


# CBI WOOD PANEL

## acoustik plus

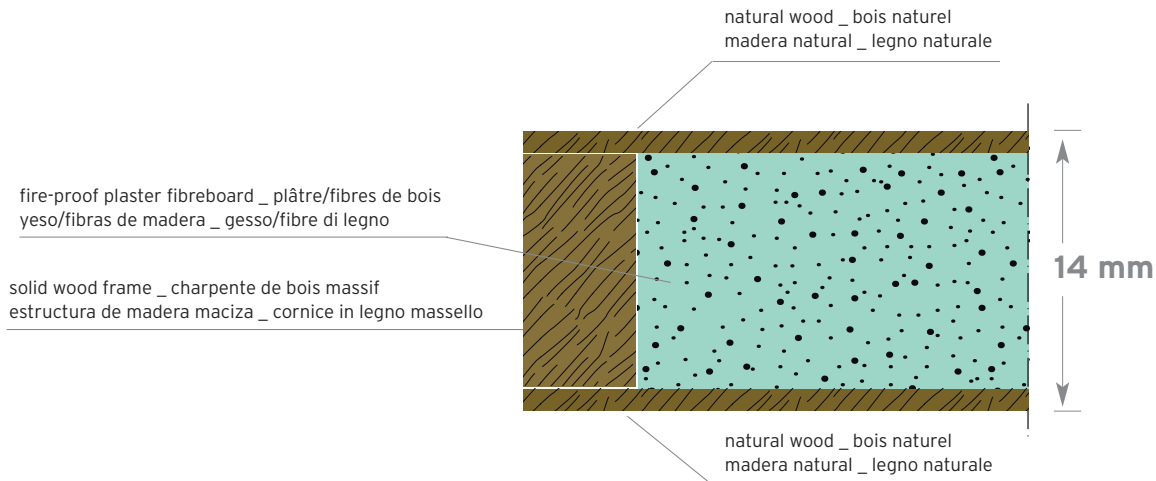

### PANEL SPECIFICATION \_ DESCRIPTION DU PANNEAU \_ DESCRIPCIÓN DU PANEL \_ DESCRIZIONE PANNELLO

Panel	Panneau	Panel	Pannello
Fire-proof high density plaster fibreboard 1.250 kg/m <sup>3</sup> .	Plâtre/fibres de bois de très haute densité 1.250 kg/m <sup>3</sup> .	Yeso/fibras de madera altísima densidad 1.250 kg/mc.	Gesso/fibre di legno altissima densità 1.250 kg/mc.
<b>Dimensions</b> <b>_suspended ceiling</b> 28/60X60/120/180 cm. <b>_wall claddings</b> 30/45/60/90X45/60/90/120/180 cm.	<b>Dimensions</b> <b>_faux plafonds</b> 30/45/60/90X45/60/90/120/180 cm. <b>_contre-cloison</b> 28/60X60/120/180 cm.	<b>Dimensiones</b> <b>_techos</b> 30/45/60/90X45/60/90/120/180 cm. <b>_contrapared</b> 28/60X60/120/180 cm.	<b>Dimensioni</b> <b>_controsoffitto</b> 28/60X60/120/180 cm. <b>_controparete</b> 30/45/60/90X45/60/90/120/180 cm.
<b>Covering</b> Natural wood.	<b>Revêtement</b> Bois naturel.	<b>Revestimiento</b> Madera natural.	<b>Rivestimento</b> Legno naturale.
<b>Border</b> Solid wood frame.	<b>Bord</b> Charpente de bois massif.	<b>Borde</b> Estructura de madera maciza.	<b>Bordatura</b> Cornice in legno massello.
<b>Backing covering</b> Nonwoven fabric (on request) 65 gr/m <sup>2</sup> .	<b>Revêtement sur le dos</b> Tissu non tissé (sur demande) 65 gr/m <sup>2</sup> .	<b>Revestimiento espalda</b> Tejido no tejido (a pedido) 65 gr/m <sup>2</sup> .	<b>Rivestimento retro</b> Tessuto non tessuto (a richiesta) 65 gr/m <sup>2</sup> .

Internal bond _ Résistance au déchirement _ Resistencia al desgarro _ Resistenza allo strappo	<b>EN 319</b>	<b>0,35 / 1,1 N/mm<sup>2</sup></b>
C.R.F.	<b>EN 310</b>	<b>9 N/mm<sup>2</sup></b>
M.O.E.	<b>EN 310</b>	<b>4000 N/mm<sup>2</sup></b>
Thickness swelling 24H (max) _ Gonflement en épaisseur 24h (max) _ Hinchamiento 24H (máx.) _ Rigonfiamento 24H (max)	<b>EN 317</b>	<b>0,08 %</b>
Surface soundness _ Déchirement superficiel _ Desgarro superficial _ Strappo superficiale	<b>EN 311</b>	<b>18 N/mm<sup>2</sup></b>
Density _ Densité _ Densidad _ Densità	<b>EN 323</b>	<b>1250 Kg/m<sup>3</sup> +/- 5%</b>
Thickness Tolerance _ Tolérance d'épaisseur _ Tolerancia de espesore _ Tolleranza di spessore	<b>EN 324-1</b>	<b>+/- 0,5 mm</b>
Length and width tolerance _ Tol. longueur et largeur _ Tolerancia de longitud y anchura _ Toll. lunghezza e larghezza	<b>EN 324-1</b>	<b>+/- 0,3 mm</b>
Squareness _ Équerrage _ Escuadrado _ Squadro	<b>EN 324-2</b>	<b>+/- 0,3 mm</b>
Moisture content _ Humidité _ Humedad _ Umidità	<b>EN 322</b>	<b>2%</b>
Grit content _ Contenu en silice _ Contenido de sílice _ Contenuto in silice	<b>ISO 3340</b>	<b>0</b>
Formaldehyde _ Formaldéhyde _ Formaldehído _ Formaldeide	<b>EN 120</b>	<b>0</b>
Fire reaction _ Réaction au feu _ Reacción al incendio _ Reazione al fuoco		<b>B s<sub>2</sub> d<sub>0</sub></b>
Fire reaction _ Réaction au feu _ Reacción al incendio _ Reazione al fuoco		
For gypsum/plaster fibreboard part _ plâtre/fibres de bois _ yeso/fibras de madera _ per la parte in gesso/fibre di legno		<b>A1</b>