


Linear strips

CUBIC EDGE MULTI PANEL system




CBI
EUROPE
HI-TECH INTERIORS

CUBIC EDGE MULTI PANEL SYSTEM

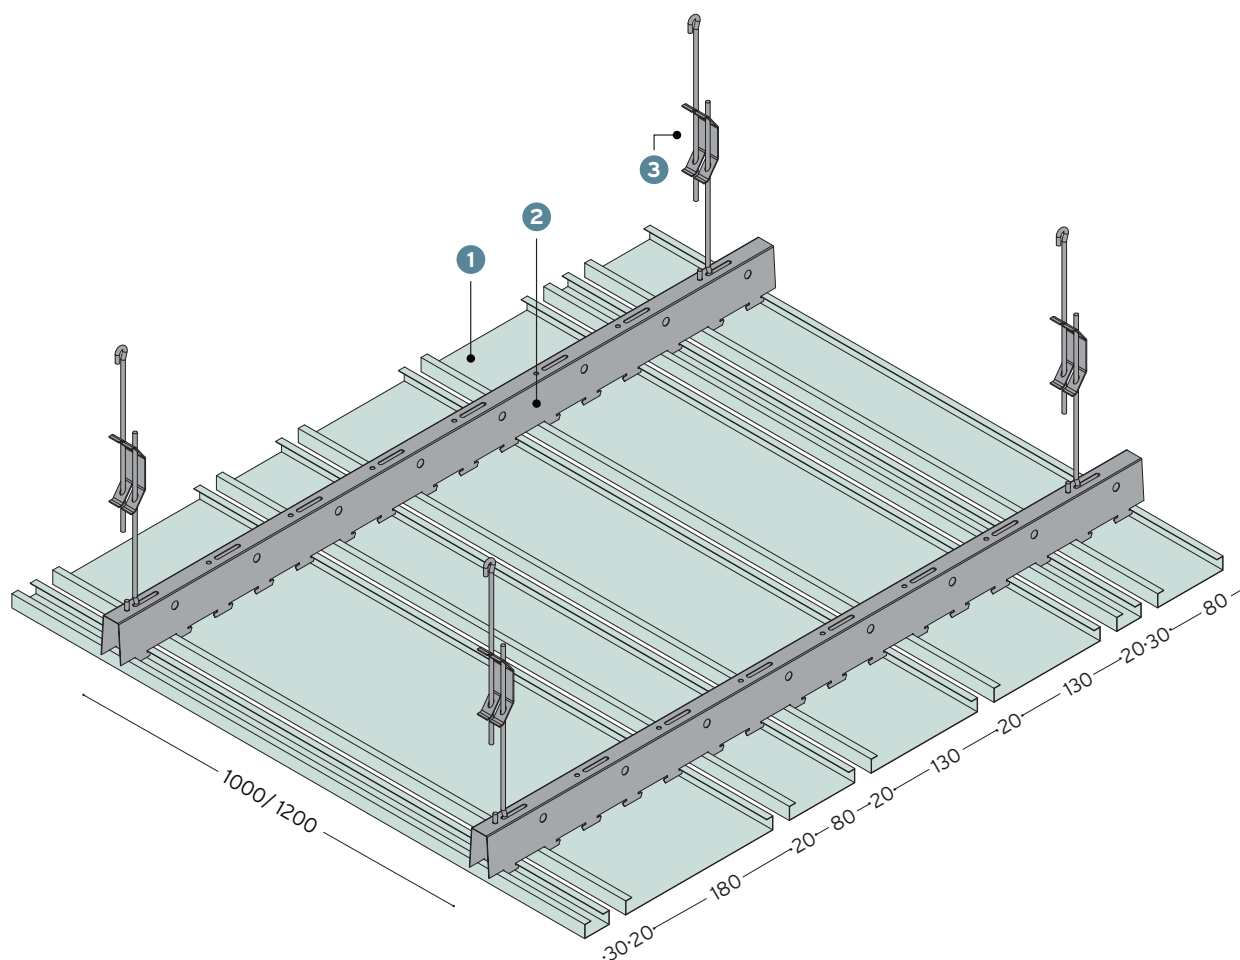

STRIP DOGA

L 9000 mm max

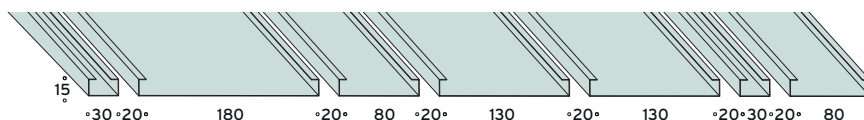


preainted aluminium
alluminio preverniciato
thk sp. 0.5 - 0.6 - 0.7 - 0.8 mm

preainted galvanized steel
acciaio zincato preverniciato
thk sp. 0.4 - 0.5 - 0.6 mm

MAIN RUNNER PROFILO PORTANTE

L 4000 mm T UNI



galvanized steel
acciaio zincato
thk sp. 0.6 mm

colour colore
brown testa di moro

1









strip
doga

2





main runner
profilo portante

3


adjustable suspension
sospensione regolabile

STRIPS / OPEN JOINT DOGHE / SCURETTO APERTO		MAIN RUNNERS _ PROFILI PORTANTI		
code _ codice	type _ tipo	code _ codice	thickness _ spessore	colour _ colore
ST030AR	metal strips pitch 50 mm open joint doghe passo 50 mm scuretto aperto size dimensioni 30x15 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
				
ST080AA	metal strips pitch 100 mm open joint doghe passo 100 mm scuretto aperto size dimensioni 80x15 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
				
ST130AA	metal strips pitch 150 mm open joint doghe passo 150 mm scuretto aperto size dimensioni 130x15 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
				
ST180AA	metal strips pitch 200 mm open joint doghe passo 200 mm scuretto aperto size dimensioni 180x15 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
				

		incidence incidenza x 100 mq (10 ml x 10 ml)			
code _ codice	size _ dim.	PCS	ml	total ml	ml/mq
ST030AR	30x15 mm	25	10	250,0	2,55
ST080AA	80x15 mm	25	10	250,0	2,5
ST130AA	130x15 mm	25	10	250,0	2,5
ST180AA	180x15 mm	13	10	130,0	1,3


ACCESSORIES _ ACCESSORI				
code _ codice	type _ tipo			
GL 20/30 B	Joint for strips ST030AR Giunto lineare per doghe ST030AR	aluminium 0.5 alluminio 0.5		
	length lunghezza 500 mm	incidence incidenza variable variabile		
GL 20/80	Joint for strips ST080AA - ST080CC Giunto lineare per doghe ST080AA - ST080CC	aluminium 0.5 alluminio 0.5		
	length lunghezza 500 mm	incidence incidenza variable variabile		
GL 20/130	Joint for strips ST130AA - ST130CC Giunto lineare per doghe ST130AA - ST130CC	aluminium 0.5 alluminio 0.5		
	length lunghezza 500 mm	incidence incidenza variable variabile		
GL 20/180	Joint for strips ST180AA Giunto lineare per doghe ST180AA	aluminium 0.5 alluminio 0.5		
	length lunghezza 500 mm	incidence incidenza variable variabile		

CUBIC EDGE MULTI PANEL 2 SYSTEM

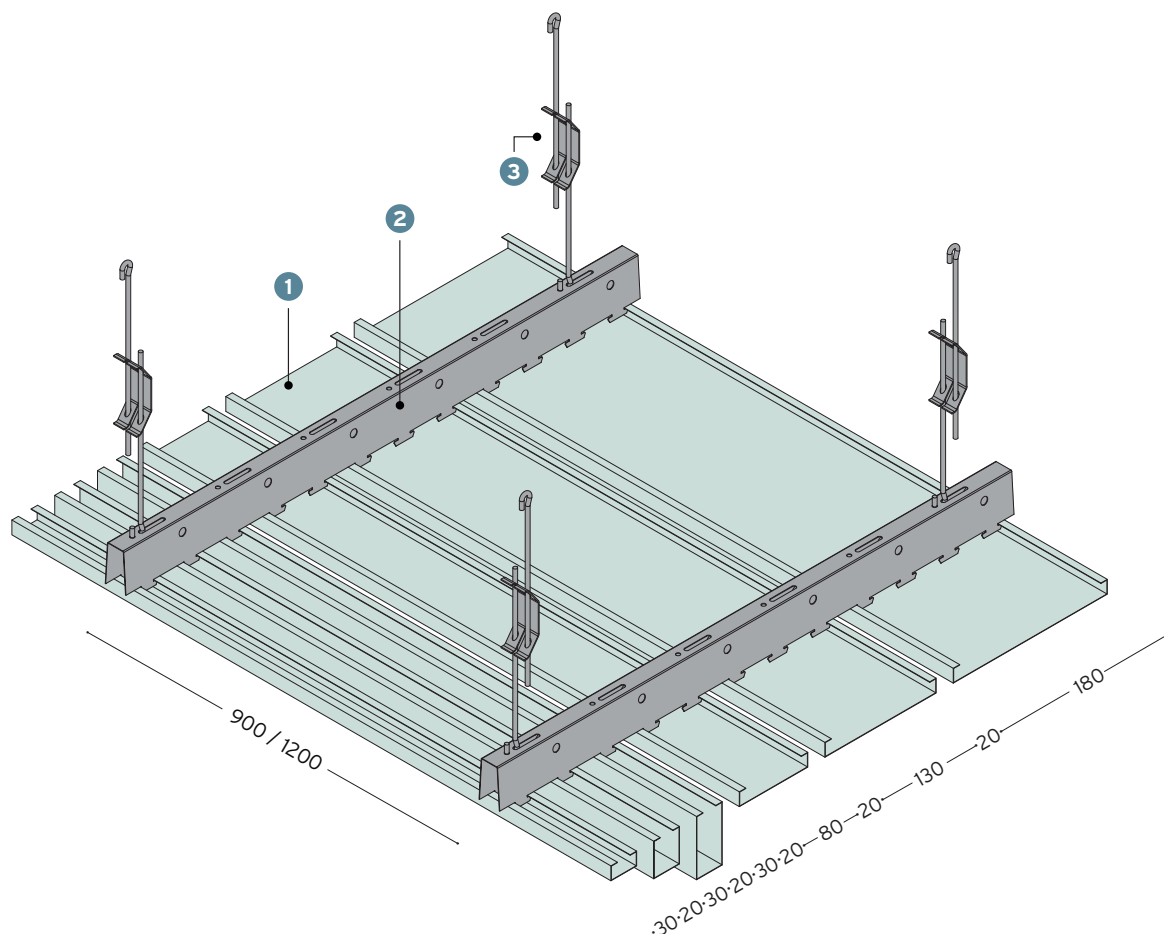

STRIP DOGA

L 9000 mm max

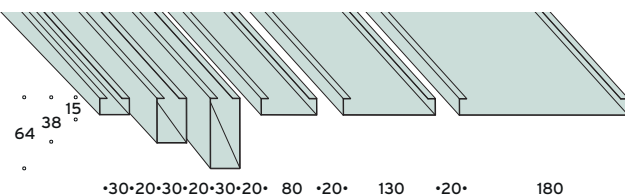


prepainted aluminium
alluminio preverniciato
thk sp. 0.5 - 0.6 mm

prepainted galvanized steel
acciaio zincato preverniciato
thk sp. 0.4 - 0.5 - 0.6 mm

MAIN RUNNER PROFILO PORTANTE

L 4000 mm T UNI



galvanized steel
acciaio zincato
thk sp. 0.6 mm

colour colore
brown testa di moro

1








strip
doga





2

main runner
profilo portante

3

adjustable suspension
sospensione regolabile

STRIPS / OPEN JOINT DOGHE / SCURETTO APERTO		MAIN RUNNERS _ PROFILI PORTANTI		
code _ codice	type _ tipo	code _ codice	thickness _ spessore	colour _ colore
ST030AR	metal strips pitch 50 mm open joint doghe passo 50 mm scuretto aperto size dimensioni 30x15 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
ST030AA	metal strips pitch 50 mm open joint doghe passo 50 mm scuretto aperto size dimensioni 30x38 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
ST030AB	metal strips pitch 50 mm open joint doghe passo 50 mm scuretto aperto size dimensioni 30x64 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
ST080AA	metal strips pitch 100 mm open joint doghe passo 100 mm scuretto aperto size dimensioni 80x15 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
ST130AA	metal strips pitch 150 mm open joint doghe passo 150 mm scuretto aperto size dimensioni 130x15 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
ST180AA	metal strips pitch 200 mm open joint doghe passo 200 mm scuretto aperto size dimensioni 180x15 mm	T UNI 	galvanized steel 0.6 acciaio zincato 0.6	brown testa di moro
			length lunghezza 4000 mm	incidence incidenza 0.9 ml/mq
incidence incidenza x 100 mq (10 ml x 10 ml)				
code _ codice	size _ dim.	PCS	ml	ml/mq
ST030AR	30x15 mm	17	10	1,7
ST030AA	30x38 mm	17	10	1,7
ST030AB	30x64 mm	17	10	1,7
ST080AA	80x15 mm	17	10	1,7
ST130AA	130x15 mm	17	10	1,7
ST180AA	180x15 mm	16	10	1,6

ACCESSORIES _ ACCESSORI											
code _ codice	type _ tipo										
GL 20/30 B 	Joint for strips ST030AR Giunto lineare per doghe ST030AR	aluminium 0.5 alluminio 0.5	 pcs_pz : 10								
	<table> <tr> <th>length</th><th>lunghezza</th><th>incidence</th><th>incidenza</th></tr> <tr> <td>250 mm</td><td></td><td>variable</td><td>variabile</td></tr> </table>	length	lunghezza	incidence	incidenza	250 mm		variable	variabile		
length	lunghezza	incidence	incidenza								
250 mm		variable	variabile								
GL 20/30 	Joint for strips ST030AA Giunto lineare per doghe ST030AA	aluminium 0.5 alluminio 0.5	 pcs_pz : 10								
	<table> <tr> <th>length</th><th>lunghezza</th><th>incidence</th><th>incidenza</th></tr> <tr> <td>250 mm</td><td></td><td>variable</td><td>variabile</td></tr> </table>	length	lunghezza	incidence	incidenza	250 mm		variable	variabile		
length	lunghezza	incidence	incidenza								
250 mm		variable	variabile								
GL 20/30 AB 	Joint for strips ST030XX Giunto lineare per doghe ST030XX	aluminium 0.5 alluminio 0.5	 pcs_pz : 10								
	<table> <tr> <th>length</th><th>lunghezza</th><th>incidence</th><th>incidenza</th></tr> <tr> <td>250 mm</td><td></td><td>variable</td><td>variabile</td></tr> </table>	length	lunghezza	incidence	incidenza	250 mm		variable	variabile		
length	lunghezza	incidence	incidenza								
250 mm		variable	variabile								
GL 20/80 	Joint for strips ST080AA Giunto lineare per doghe ST080AA	aluminium 0.5 alluminio 0.5	 pcs_pz : 10								
	<table> <tr> <th>length</th><th>lunghezza</th><th>incidence</th><th>incidenza</th></tr> <tr> <td>250 mm</td><td></td><td>variable</td><td>variabile</td></tr> </table>	length	lunghezza	incidence	incidenza	250 mm		variable	variabile		
length	lunghezza	incidence	incidenza								
250 mm		variable	variabile								
GL 20/130 	Joint for strips ST130AA Giunto lineare per doghe ST130AA	aluminium 0.5 alluminio 0.5	 pcs_pz : 10								
	<table> <tr> <th>length</th><th>lunghezza</th><th>incidence</th><th>incidenza</th></tr> <tr> <td>250 mm</td><td></td><td>variable</td><td>variabile</td></tr> </table>	length	lunghezza	incidence	incidenza	250 mm		variable	variabile		
length	lunghezza	incidence	incidenza								
250 mm		variable	variabile								
GL 20/180 	Joint for strips ST180AA Giunto lineare per doghe ST180AA	aluminium 0.5 alluminio 0.5	 pcs_pz : 10								
	<table> <tr> <th>length</th><th>lunghezza</th><th>incidence</th><th>incidenza</th></tr> <tr> <td>250 mm</td><td></td><td>variable</td><td>variabile</td></tr> </table>	length	lunghezza	incidence	incidenza	250 mm		variable	variabile		
length	lunghezza	incidence	incidenza								
250 mm		variable	variabile								

INDOOR LINEAR STRIPS *DOGHE LINEARI PER INTERNI* PERFORATION PANELS *FORATURE PANNELLI*


standard width *larghezza standard* < 600 mm

■ ● perforation *forature*

MICRO PERFORATION *MICRO FORATURE*


H - AP0/1

Ø 0.7 mm - parallel pitch ▪ *passo parallelo* 5 mm

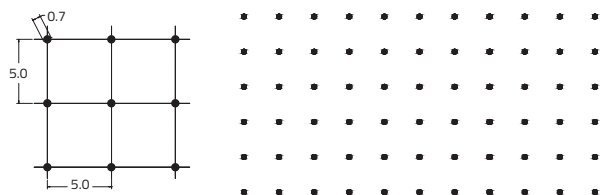

I - AP0/2


Ø 0.7 mm - parallel pitch ▪ *passo parallelo* 5 mm

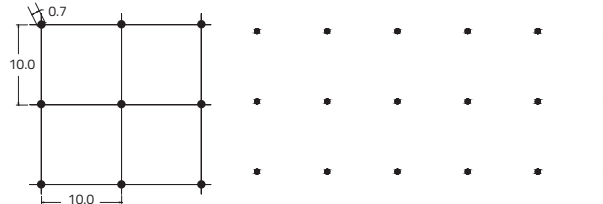

STANDARD PERFORATIONS *FORATURE STANDARD*


A

Ø 2.5 mm = 20% - parallel pitch ▪ *passo parallelo* 5 mm

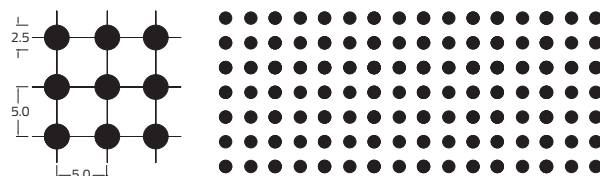


B

Ø 2.5 mm = 7% - diagonal pitch ▪ *passo diagonale* 8.5 mm

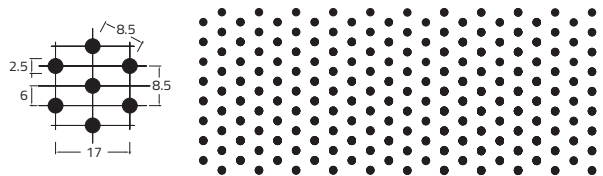


C

Ø 2.0 mm = 6% - diagonal pitch ▪ *passo diagonale* 8 mm

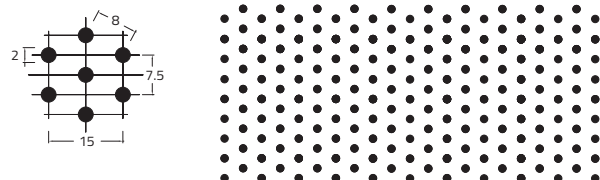


D

Ø 2.0 mm = 12% - parallel pitch ▪ *passo parallelo* 7.5 mm

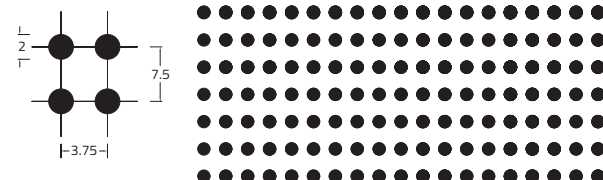


E - AP3

Ø 2.0 mm = 25% - diagonal pitch ▪ *passo diagonale* 3.5 mm

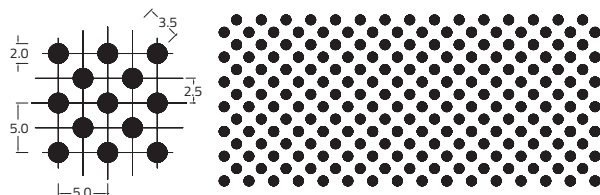


F - AP4

Ø 2.0 mm = 12.5% - parallel pitch ▪ *passo parallelo* 5 mm

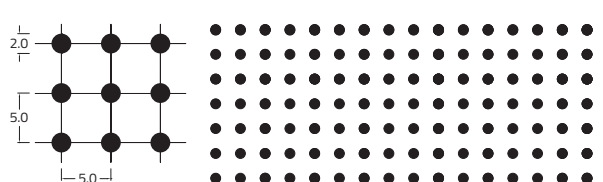

G - APQ2


2 x 2 = 4.5% - parallel pitch ▪ *passo parallelo* 9.5 mm

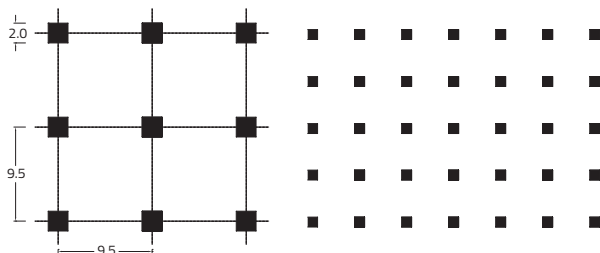

PERIMETRAL MOLDING


standard lenght 3000 mm

For special dimension perimetral moldings are available




20 X 24

CP10 aluminum 0.5/0.6 mm
A3000 steel 0.5/0.6 mm




24 X 40

CP20 aluminum 0.5/0.6 mm
A3002 steel 0.5/0.6 mm




24 X 24

CP11 aluminum 0.5/0.6 mm
A3001 steel 0.5/0.6 mm




19 X 31

CP30 aluminum 0.5/0.6 mm
A3003 steel 0.5/0.6 mm




24 X 20 X 20 X 24

CW2020 aluminum 0.5/0.6 mm
W3003 steel 0.5/0.6 mm




24 X 15 X 15 X 24

CW1515 aluminum 0.5/0.6 mm
W3004 steel 0.5/0.6 mm



20 X 12 X 12 X 24

CW1210 aluminum 0.5/0.6 mm
W3000 steel 0.5/0.6 mm




25 X 8 X 15 X 15

CW0815 aluminum 0.5/0.6 mm
W3002 steel 0.5/0.6 mm

COLOURS RANGE

STEEL / ALUMINIUM




white



RAL 9006
silver



RAL 7024
dark grey



RAL 9005
black



satin-finish aluminium

POWDER COATED



ALL RAL COLOURS


WOOD



SL57
whitened oak



SL56
cherry tree

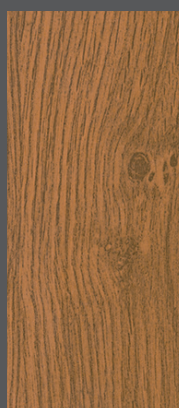


SL252
winchester



SL02
light oak



6869
farm maple

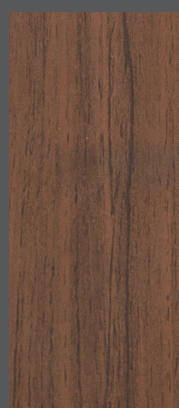

SL28
teak



SL39
dark oak

ALUMINIUM / MAT



RAL 1015
ivory



RAL 1001
beige



RAL 1021
cadmio yellow



RAL 1007
chrome yellow



RAL 2004
orange



RAL 3002
carmine red



navy blue



RAL 5017
blue



RAL 6018
pea green



RAL 6029
mint colour



RAL 8014
brown

ALUMINIUM / BRIGHT



aisi steel
310



brass yellow
330



gold
260

The range of colours shown on this page is purely indicative, and we recommended that you request the samples. For other colours, please ask about the availability in stock.

For further details, refer to the bundle of RAL colours and CBI's exclusive colours bundle, or contact the technical department at CBI Europe.

LINEAR STRIPS: design and functionality, 100% made in Italy.

CBI Europe's Linear Strips suspended ceiling system is the perfect solution for civil and industrial buildings. These highly functional architectural elements combine thermal and acoustic insulation with the ability

to integrate ventilation, lighting and security systems. The fully inspectable strips come in various modular types and designs to allow the suspended ceiling to adapt to all spaces and layouts.



AESTETICH VERSATILITY



LIMITLESS CONFIGURATION



HI-TECH PERFORMANCES

Why

VERSATILE, FUNCTIONAL, LONG LASTING AND EASY TO INSTALL: A PERFECT COMBINATION OF TECHNOLOGY AND DESIGN THAT GUARANTEES HYGIENE AND STRENGTH.

Where

LARGE PUBLIC SPACES - HALLS, SHOPPING CENTRES, AIRPORTS, BANKS, OFFICES, CORRIDORS, STERILE ENVIRONMENTS, THEATRES, CANTEENS, HOSPITALS - OUTDOORS AND INDOORS.

Benefit

- **ACHIEVING FLEXIBLE, COMFORTABLE, CONTEMPORARY AND RESPONSIBLE INTERIORS.**
- **OBTAINING POINTS FOR LEED CERTIFICATION.**
- **SOUNDPROOFED ENVIRONMENTS.**
- **SPEEDING UP CONSTRUCTION.**
- **CONTAINING COSTS OF LABOUR AND MAINTENANCE.**
- **STRUCTURES 100% INSPECTABLE.**
- **INTEGRATION WITH ADVANCED CLIMATE CONTROL, DOMOTICS AND LIGHTING.**
- **PRECISE BUDGETING.**



FIRE REACTION

Including versions incorporating sound-absorbing non-woven fabric, are non-flammable according to the Italian Ministerial Decree of the 15th march 2005, and therefore conform to Euroclass A1 fire reaction requirements (only for not perforated panels).



HYGIENE

Easy to wash and sterilise, non-toxic, humidity resistant, and are ideal for use in kitchens, canteens, hospitals and schools.

On request, they can also be supplied in a special fungicidal and bactericidal paint finish: tests carried out under ISO 22196 ensure the reduction of the microbial population > 95% after 24 hours. They also provide valuable protection against dust in industries producing delicate electronic circuits.



HUMIDITY RESISTANCE

Maintain their dimensional stability even under extreme ambient conditions, and can therefore be installed in environments characterised by high levels of relative humidity and large variations in temperature.

For outdoor installations, please contact CBI Europe's Technical Department.



PAINTWORK

Suspended ceilings in pre-painted aluminium and hot-galvanised and pre-painted FeP02 steel are coil-coated with primer and polyester paint to a thickness of 25 microns.

Suspended ceilings in electro-galvanised and post-painted FeP02 steel are electrostatically coated with resin based, thermosetting, polyester powder paints to a thickness of 60 microns.



LIGHT REFLECTANCE

All metal suspended ceilings finished in white and unperforated > 85% have a standard gloss level of 20.



INTEGRATED ACCESSORIES

All metal suspended ceilings can be fitted with accessories such as lighting units, ventilation vents, smoke detectors, sprinklers and suspended signage



FASTNESS

The systems are designed to guarantee rapid installation, speeding up the installation phases and respecting all the requirements of planarity and orthogonality.



ACOUSTIC ABSORPTION

Ceilings and coverings combine acoustic performance, comfort and aesthetics with adequate absorption values. Upon request they can be supplied with certifications issued by independent companies.



LEED CERTIFICATION

All products are manufactured in certified and constantly monitored processes to guarantee the highest standards of quality and safety.



ANTI-SEISMIC

The systems guarantee the application of all good safety practices in the construction and development of dedicated projects.

Upon request, they can be supplied with an anti-seismic reports, which indicate suitable bracing.