



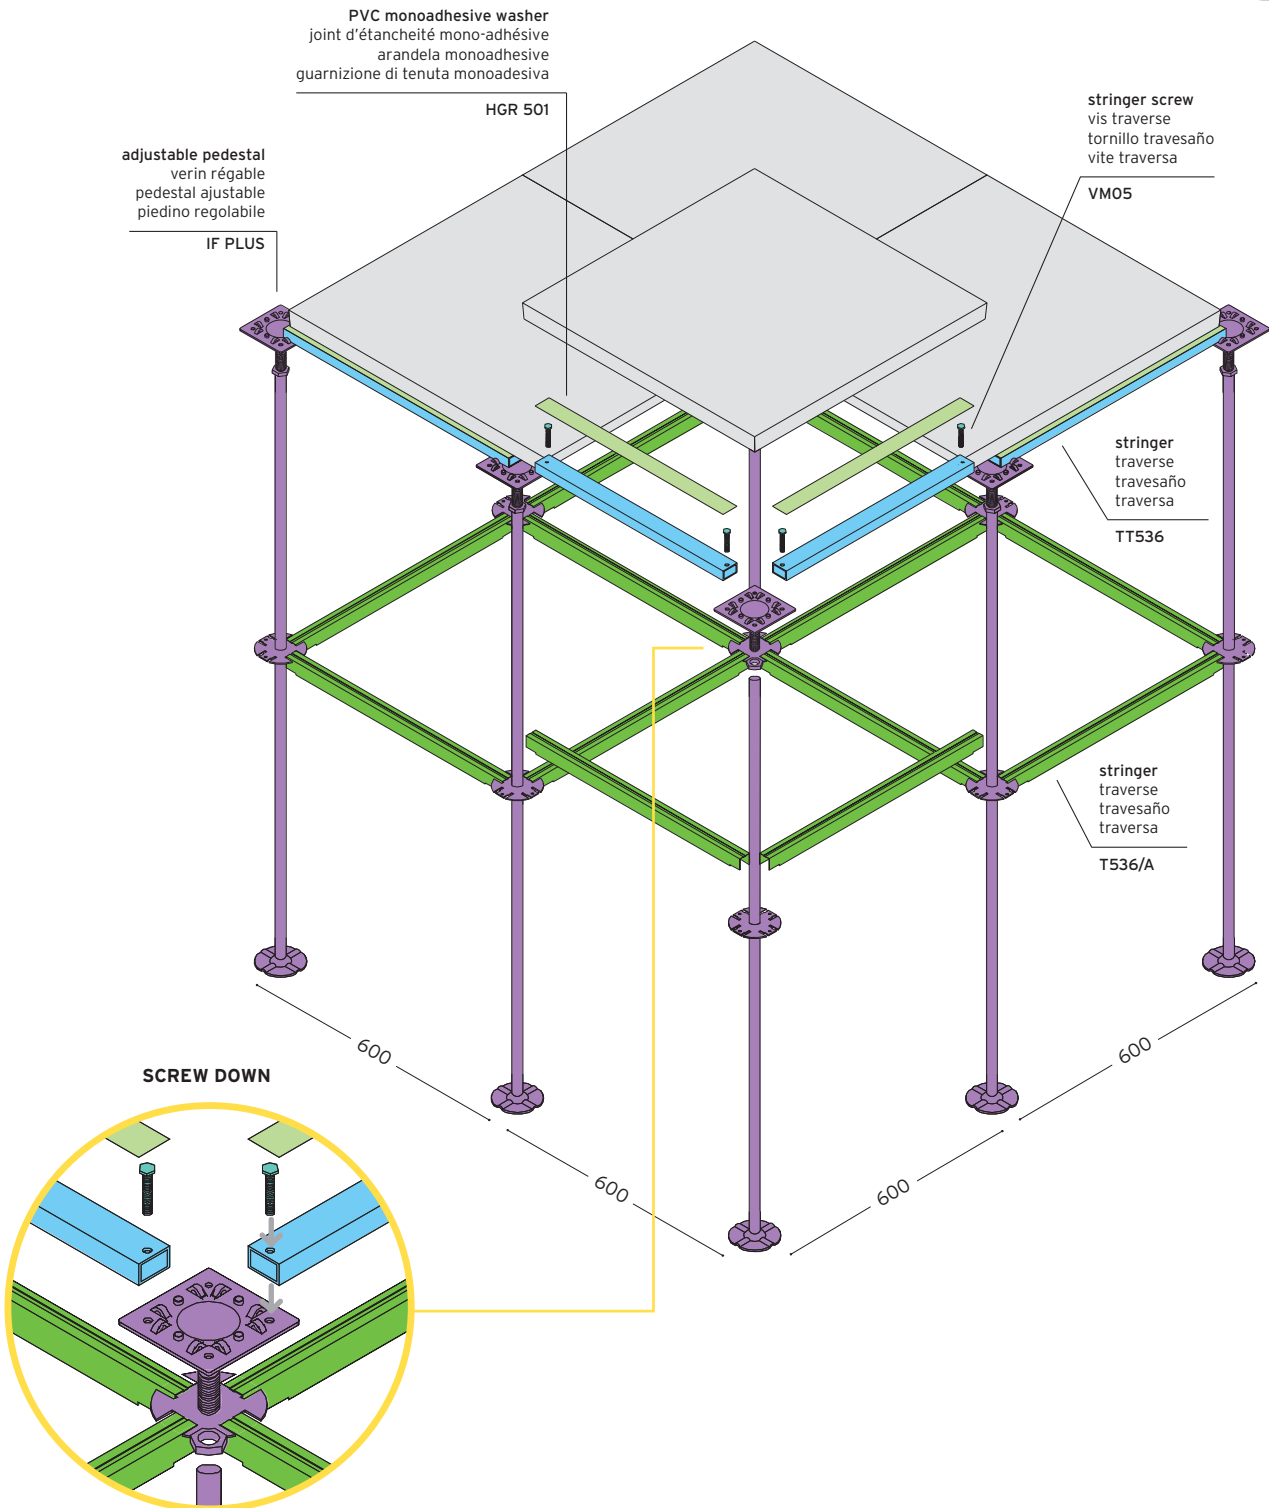

FLOOR SYSTEM **IF PLUS**



PEDESTAL _ VERIN _ PEDESTAL _ PIEDINO

	code	height	weight/pcs
<p>IF PLUS</p> <p>adjustable pedestal IF PLUS verin réglable IF PLUS pedestal ajustable IF PLUS pedino regolabile IF PLUS</p> <p>thickness _ spessore 3 mm</p>	IF PLUS 1000/1250	1000/1250 mm	1,50 Kg
	IF PLUS 1250/1500	1250/1500 mm	1,80 Kg

STRUCTURE _ STRUCTURE _ ESTRUCTURA _ STRUTTURA

stringer _ traverse _ travesaño _ traversa di collegamento		system components _ éléments du système elementos de sistema - elementi del sistema	
<p>TT536</p> <p>weight_peso 0,440 kg/pcs thickness _ spessore 1 mm</p>	<p>open section stringer made with galvanised steel, Screw Down System with PVC washer.</p> <p>traverse à section ouverte en acier galvanisé, système Screw Down avec joint d'étanchéité.</p> <p>travesaño de conexión con sección abierta de acero galvanizado, sistema Screw Down con arandela.</p> <p>traversa di collegamento a sezione aperta in acciaio zincato mod. Screw Down con guarnizioni di tenuta.</p>	<p>IF PLUS</p> <p>pedestal _ verin pedestal _ piedino</p> <p>size _ dimensioni * incidence _ incidenza ø 90 mm 3,3 pcs/mq</p>	
		<p>TT536</p> <p>stringer _ traverse travesaño _ traversa</p> <p>size _ dimensioni * incidence _ incidenza 30x20x1x560 mm 6,0 pcs/mq</p>	
		<p>VM05</p> <p>stringer screw _ vis traverse tornillo travesaño _ vite traversa</p> <p>size _ dimensioni * incidence _ incidenza 6 mm 12 pcs/mq</p>	
		<p>HGR 501</p> <p>PVC mono adhesive washer joint d'étanchéité mono-adhésive arandela mono adhesive guarnizione di tenuta monoadesiva</p> <p>size _ dimensioni * incidence _ incidenza ø 90 mm 6,0 pcs/mq</p>	
<p>T536/A HEAVY</p> <p>weight_peso 0.386 kg/pcs thickness _ spessore 1 mm</p>	<p>open section stringer made with galvanised steel, Clip-On System with PVC washer.</p> <p>traverse à section ouverte en acier galvanisé, système Clip-On avec joint d'étanchéité.</p> <p>travesaño de conexión con sección abierta de acero galvanizado, sistema Clip-On con arandela.</p> <p>traversa di collegamento a sezione aperta in acciaio zincato mod. Clip-On con guarnizioni di tenuta.</p>	<p>T536/A</p> <p>stringer _ traverse travesaño _ traversa</p> <p>size _ dimensioni * incidence _ incidenza L 560 mm 6,0 pcs/mq</p>	
<p>Technical dates / Aspects of performance value (UNI 13964 - 2005) Dati tecnici / Aspetti pertinenti a valori prestazionali (UNI 13964 - 2005)</p>			
<p>FIRE REACTION _ REAZIONE AL FUOCO (Under structure) Class A1 DM 10/03/05 DEC. 2000/147/CE</p>			
<p>MECHANICAL RESISTANCE _ RESISTENZA MECCANICA (Under structure) 548.80 N/m2 Normal break load/Carico normale di rottura (Under structure) 219.50 N/m2 Normal operating load/Carico normale di esercizio</p>			
<p>DURABILITY _ DURABILITÀ Protection against corrosion _ Protezione contro la corrosione: EN 10327</p>			

*incidence _ incidenza per: area 100 mq > cf. modularity _ modularità pages